



# CloudEngine S5335-S Series Switches Brochure





Huawei CloudEngine S5335-S series are standard gigabit Ethernet switches that provide all GE downlink ports and 10GE uplink ports.



## Product Overview

CloudEngine S5335-S series switches are developed based on next-generation high-performing hardware and the Huawei Versatile Routing Platform (VRP). CloudEngine S5335-S switches support simplified operations and maintenance (O&M), and flexible Ethernet networking. It also provides enhanced Layer 3 features and mature IPv6 features. CloudEngine S5335-S switches can be used in various scenarios. For example, it can be used as an access or aggregation switch on a campus network or as an access switch in a data center.

## Models and Appearances

The following models are available in the CloudEngine S5335-S series.

| Models and Appearances  | Description  |
|---|--|
| <br>CloudEngine S5335-S24T4X | <ul style="list-style-type: none"> <li>• 24 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports</li> <li>• 1+1 power supply backup</li> <li>• Forwarding performance: 96 Mpps</li> <li>• Switching capacity: 128 Gbps/336 Gbps</li> </ul>                |
| <br>CloudEngine S5335-S24P4X | <ul style="list-style-type: none"> <li>• 24 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports</li> <li>• 1+1 power supply backup</li> <li>• PoE+</li> <li>• Forwarding performance: 96 Mpps</li> <li>• Switching capacity: 128 Gbps/336 Gbp</li> </ul> |
| <br>CloudEngine S5335-S48T4X | <ul style="list-style-type: none"> <li>• 48 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports</li> <li>• 1+1 power supply backup</li> <li>• Forwarding performance: 132 Mpps</li> <li>• Switching capacity: 176 Gbps/432 Gbps</li> </ul>               |
| <br>CloudEngine S5335-S48P4X | <ul style="list-style-type: none"> <li>• 48 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports</li> <li>• 1+1 power supply backup</li> <li>• PoE+</li> <li>• Forwarding performance: 132 Mpps</li> </ul>  |

| Models and Appearances   | Description   |
|--|---|
|  <p>CloudEngine S5335-S32ST4X</p> | <ul style="list-style-type: none"> <li>Switching capacity: 176 Gbps/432 Gbps</li> <li>24 x GE SFP ports, 8 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports</li> <li>1+1 power supply backup</li> <li>Forwarding performance: 108 Mpps</li> <li>Switching capacity: 144 Gbps/432 Gbps</li> </ul> |
|  <p>CloudEngine S5335-S48S4X</p>  | <ul style="list-style-type: none"> <li>48 x GE SFP ports, 4 x 10 GE SFP+ ports</li> <li>1+1 power supply backup</li> <li>Forwarding performance: 132 Mpps</li> <li>Switching capacity: 176 Gbps/432 Gbps</li> </ul>   |

## Features and Highlights

### Powerful Service Processing Capability and Multiple Security Control Mechanisms

- CloudEngine S5335-S supports a broad set of Layer 2/Layer 3 multicast protocols, such as PIM SM, PIM DM, PIM SSM, MLD, and IGMP snooping. This capability is ideal for high-definition video surveillance and video conferencing access.
- CloudEngine S5335-S provides multiple Layer 3 features including OSPF, IS-IS, BGP, and VRRP, meeting enterprises' access and aggregation service needs and enabling a variety of voice, video, and data applications.
- CloudEngine S5335-S supports MAC address authentication, 802.1X authentication, and Portal authentication, and implements dynamic delivery of policies (VLAN, QoS, and ACL) to users.
- CloudEngine S5335-S provides a series of mechanisms to defend against DoS attacks and user-targeted attacks. DoS attacks are targeted at switches and include SYN flood, Land, Smurf, and ICMP flood attacks. User-targeted attacks include bogus DHCP server attacks, IP/MAC address spoofing, DHCP request flood, and changing of the DHCP CHADDR value.
- CloudEngine S5335-S sets up and maintains a DHCP snooping binding table, and discards the packets that do not match the table entries. The DHCP snooping trusted port feature ensures that users connect only to the authorized DHCP server.
- CloudEngine S5335-S supports strict ARP learning, which protects a network against ARP spoofing attacks to ensure that users can connect to the Internet normally.

### Easy O&M

- CloudEngine S5335-S supports Super Virtual Fabric (SVF), which innovatively virtualizes the "core/aggregation switch + access switch + AP" into one logical device. This simplifies device management and achieves plug-and-play for access switches and APs. In addition, CloudEngine S5335-S supports service configuration templates. The templates are configured on core devices and automatically delivered to access devices, enabling centralized control, simplified service configuration, and flexible configuration adjustment. CloudEngine S5335-S functions as a client in an SVF system.
- CloudEngine S5335-S supports Huawei Easy Operation, a solution that provides zero-touch deployment, replacement of faulty devices without additional configuration, USB-based deployment, batch device configuration, and batch remote upgrade. The capabilities facilitate device deployment, upgrade, service provisioning, and other management and maintenance operations, and also greatly reduce O&M costs. CloudEngine S5335-S can be managed using SNMP v1/v2c/v3, CLI, web-based network management system, or SSH v2.0. Additionally, it supports RMON, multiple log hosts, port traffic statistics collection, and network quality analysis, which facilitate network optimization and reconstruction.
- CloudEngine S5335-S supports the Sampled Flow (sFlow) function. It uses a method defined in the sFlow standard to sample traffic passing through it and sends sampled traffic to the collector in real time. The collected traffic statistics are used to generate statistical reports, helping enterprises maintain their networks.

### Multiple Reliability Mechanisms

- CloudEngine S5335-S is equipped with two pluggable power modules that work in 1+1 redundancy backup mode. Mixed installation of AC and DC power modules is supported, allowing for flexible configuration of AC or DC power modules according to service requirements.
- In addition to supporting traditional Spanning Tree Protocol (STP), Rapid Spanning Tree Protocol (RSTP), and Multiple Spanning Tree Protocol (MSTP), CloudEngine S5335-S is also designed with Huawei-developed Smart Ethernet Protection

(SEP) technology and the industry's latest Ethernet Ring Protection Switching (ERPS) technology. SEP is a ring protection protocol specific to the Ethernet link layer, and applies to various ring network topologies, such as open ring topology, closed ring topology, and cascading ring topology. This protocol is reliable, easy to maintain, and implements fast protection switching within 50 ms. ERPS is defined in ITU-T G.8032, and it implements millisecond-level protection switching based on traditional Ethernet MAC and bridging functions.

- CloudEngine S5335-S supports Smart Link, which implements backup of uplinks. One CloudEngine S5335-S switch can connect to multiple aggregation switches through multiple links, significantly improving reliability of access devices.
- CloudEngine S5335-S supports Ethernet OAM (IEEE 802.3ah/802.1ag) to fast-detect link faults.

## Intelligent O&M

- CloudEngine S5335-S provides telemetry technology to collect device data in real time and send the data to Huawei campus network analyzer CampusInsight. The CampusInsight analyzes network data based on the intelligent fault identification algorithm, accurately displays the real-time network status, effectively demarcates and locates faults in a timely manner, and identifies network problems that affect user experience, accurately guaranteeing user experience.
- CloudEngine S5335-S supports a variety of intelligent O&M features for audio and video services, including the enhanced Media Delivery Index (eMDI). With this eMDI function, the switch can function as a monitored node to periodically conduct statistics and report audio and video service indicators to the CampusInsight platform. In this way, the CampusInsight platform can quickly demarcate audio and video service quality faults based on the results of multiple monitored nodes.

## PoE Function

- **Perpetual PoE:** When a PoE switch is abnormal Power-off or the software version is upgraded, the power supply to PDs is not interrupted. This capability ensures that PDs are not powered off during the switch reboot.
- **Fast PoE:** PoE switches can supply power to PDs within seconds after they are powered on. This is different from common switches that generally take 1 to 3 minutes to start to supply power to PDs. When a PoE switch reboots due to a power failure, the PoE switch continues to supply power to the PDs immediately after being powered on without waiting until it finishes reboot. This greatly shortens the power failure time of PDs.

## Mature IPv6 Technologies

- CloudEngine S5335-S uses the mature, stable VRRP platform and supports IPv4/IPv6 dual stack, IPv6 RIPng, and IPv6 over IPv4 tunnels (including manual, 6-to-4, and ISATAP tunnels).
- CloudEngine S5335-S can be deployed on a pure IPv4 network, a pure IPv6 network, or a shared IPv4/IPv6 network, helping achieve IPv4-to-IPv6 transition.

## OPS

- CloudEngine S5335-S supports Open Programmability System (OPS), an open programmable system based on the Python language. IT administrators can program the O&M functions of a CloudEngine S5335-S switch through Python scripts to quickly innovate functions and implement intelligent O&M.

## Intelligent Upgrade

- CloudEngine S5335-S supports the intelligent upgrade feature. Specifically, CloudEngine S5335-S obtains the version upgrade path and downloads the newest version for upgrade from the Huawei Online Upgrade Platform (HOUP). The entire upgrade process is highly automated and achieves one-click upgrade. In addition, preloading the version is supported, which greatly shortens the upgrade time and service interruption time.
- The intelligent upgrade feature greatly simplifies device upgrade operations and makes it possible for the customer to upgrade the version independently. This greatly reduces the customer's maintenance costs. In addition, the upgrade policies on the HOUP platform standardize the upgrade operations, which greatly reduces the risk of upgrade failures.

# Product Specifications

| Item       | CloudEngine S5335-S24P4X      | CloudEngine S5335-S24T4X      | CloudEngine S5335-S32ST4X                           |
|------------|-------------------------------|-------------------------------|---|
| Fixed port | 24 x 10/100/1000Base-T ports, | 24 x 10/100/1000Base-T ports, | 24 x GE SFP ports, 8 x 10/100/1000Base-T ports, 4 x |

| Item                                 | CloudEngine S5335-S24P4X   | CloudEngine S5335-S24T4X  | CloudEngine S5335-S32ST4X   |
|--------------------------------------|--|---|---|
|                                      | 4 x 10 GE SFP+ ports   | 4 x 10 GE SFP+ ports  | 10 GE SFP+ ports  |
| Dimensions (H x W x D)               | 43.6 mm x 442 mm x 420 mm  | 43.6 mm x 442 mm x 420 mm   | 43.6 mm x 442 mm x 420 mm   |
| Chassis height                       | 1 U  | 1 U   | 1 U   |
| Chassis weight (including packaging) | 7.39 kg  | 7.21 kg   | 7.47 kg   |
| Power supply type                    | 1000 W AC PoE  | <ul style="list-style-type: none"> <li>60 W AC</li> <li>1000 W DC</li> </ul>  | <ul style="list-style-type: none"> <li>60 W AC</li> <li>1000 W DC</li> </ul>  |
| Rated voltage range                  | AC input (1000 W AC PoE): 100 V AC to 240 V AC, 50/60 Hz   | <ul style="list-style-type: none"> <li>AC input (60 W AC): 100 V AC to 240 V AC, 50/60 Hz</li> <li>DC input (1000 W DC): -48 VDC to -60 V DC</li> </ul>   | <ul style="list-style-type: none"> <li>AC input (60 W AC): 100 V AC to 240 V AC, 50/60 Hz</li> <li>DC input (1000 W DC): -48 VDC to -60 V DC</li> </ul>   |
| Maximum voltage range                | <ul style="list-style-type: none"> <li>AC input (1000 W AC PoE): 90 V AC to 290 V AC, 45 Hz to 65 Hz</li> <li>High-voltage DC input (1000 W AC PoE): 190 V DC to 290 V DC (meeting 240 V high-voltage DC certification)</li> </ul> | <ul style="list-style-type: none"> <li>AC input (60 W AC): 90 V AC to 264 V AC, 47 Hz to 63 Hz</li> <li>High-voltage DC input (60 W AC): 190 V DC to 290 V DC (meeting 240 V high-voltage DC certification)</li> <li>DC input (1000 W DC): -36 V DC to -72V DC</li> </ul> | <ul style="list-style-type: none"> <li>AC input (60 W AC): 90 V AC to 264 V AC, 47 Hz to 63 Hz</li> <li>High-voltage DC input (60 W AC): 190 V DC to 290 V DC (meeting 240 V high-voltage DC certification)</li> <li>DC input (1000 W DC): -36 V DC to -72V DC</li> </ul> |
| Maximum power consumption            | <ul style="list-style-type: none"> <li>65 W (without PD)</li> <li>847 W (with PD, PD power consumption of 720 W)</li> </ul>  | 46 W  | 66 W  |
| Noise                                | <ul style="list-style-type: none"> <li>Under normal temperature (sound power): 58.9dB (A)</li> <li>Under high temperature (sound power): 75dB (A)</li> <li>Under normal temperature (sound pressure): 43.8dB (A)</li> </ul>        | <ul style="list-style-type: none"> <li>Under normal temperature (sound power): 58.9dB (A)</li> <li>Under high temperature (sound power): 75dB (A)</li> <li>Under normal temperature (sound pressure): 43.8dB (A)</li> </ul>   | <ul style="list-style-type: none"> <li>Under normal temperature (sound power): 59.3dB (A)</li> <li>Under high temperature (sound power): 75.4dB (A)</li> <li>Under normal temperature (sound pressure): 44.2dB (A)</li> </ul>   |
| Long-term operating temperature      | <ul style="list-style-type: none"> <li>0-1800 m altitude: 0°C to +50°C</li> <li>1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m.</li> </ul>                              | <ul style="list-style-type: none"> <li>0-1800 m altitude: 0°C to +50°C</li> <li>1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m.</li> </ul>   | <ul style="list-style-type: none"> <li>0-1800 m altitude: 0°C to +50°C</li> <li>1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m.</li> </ul>   |
| Short-term operating temperature     | <ul style="list-style-type: none"> <li>0-1800 m altitude: -5°C to +55°C</li> <li>1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m.</li> </ul>                             | <ul style="list-style-type: none"> <li>0-1800 m altitude: -5°C to +55°C</li> <li>1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m.</li> </ul>  | <ul style="list-style-type: none"> <li>0-1800 m altitude: -5°C to +55°C</li> <li>1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m.</li> </ul>  |
| Storage temperature                  | -40°C to +70°C   | -40°C to +70°C  | -40°C to +70°C  |

| Item  | CloudEngine S5335-S24P4X                                     | CloudEngine S5335-S24T4X   | CloudEngine S5335-S32ST4X  |
|---|--|--|--|
| Relative humidity                             | 5% to 95% (non-condensing)                                   | 5% to 95% (non-condensing)   | 5% to 95% (non-condensing)   |
| Surge protection specification (service port) | ±7 kV in common mode   | ±7 kV in common mode   | ±7 kV in common mode   |
| Surge protection specification (power port)   | ±6 kV in differential mode, ±6 kV in common mode             | <ul style="list-style-type: none"> <li>AC power port: ±6 kV in differential mode, ±6 kV in common mode</li> <li>DC power port: ±2 kV in differential mode, ±4 kV in common mode</li> </ul> | <ul style="list-style-type: none"> <li>AC power port: ±6 kV in differential mode, ±6 kV in common mode</li> <li>DC power port: ±2 kV in differential mode, ±4 kV in common mode</li> </ul> |
| Heat dissipation                              | Air-cooled heat dissipation and intelligent speed adjustment | Air-cooled heat dissipation and intelligent speed adjustment   | Air-cooled heat dissipation and intelligent speed adjustment   |

| Item                                 | CloudEngine S5335-S48P4X   | CloudEngine S5335-S48S4X  | CloudEngine S5335-S48T4X  |
|--------------------------------------|--|---|---|
| Fixed port                           | 48 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports   | 48 x GE SFP ports, 4 x 10 GE SFP+ ports   | 48 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports  |
| Dimensions (H x W x D)               | 43.6 mm x 442 mm x 420 mm  | 43.6 mm x 442 mm x 420 mm   | 43.6 mm x 442 mm x 420 mm   |
| Chassis height                       | 1 U  | 1 U   | 1 U   |
| Chassis weight (including packaging) | 7.64 kg  | 8.27 kg   | 7.69 kg   |
| Power supply type                    | 1000 W AC PoE  | <ul style="list-style-type: none"> <li>150 W AC</li> <li>1000 W DC</li> </ul>   | <ul style="list-style-type: none"> <li>60 W AC</li> <li>1000 W DC</li> </ul>  |
| Rated voltage range                  | AC input (1000 W AC PoE): 100 V AC to 240 V AC, 50/60 Hz   | <ul style="list-style-type: none"> <li>AC input (150 W AC): 100 V AC to 240 V AC, 50/60 Hz</li> <li>DC input (1000 W DC): -48 VDC to -60 V DC</li> </ul>      | <ul style="list-style-type: none"> <li>AC input (60 W AC): 100 V AC to 240 V AC, 50/60 Hz</li> <li>DC input (1000 W DC): -48 VDC to -60 V DC</li> </ul>   |
| Maximum voltage range                | <ul style="list-style-type: none"> <li>AC input (1000 W AC PoE): 90 V AC to 290 V AC, 45 Hz to 65 Hz</li> <li>High-voltage DC input (1000 W AC PoE): 190 V DC to 290 V DC (meeting 240 V high-voltage DC certification)</li> </ul> | <ul style="list-style-type: none"> <li>AC input (150 W AC): 90 V AC to 264 V AC, 47 Hz to 63 Hz</li> <li>DC input (1000 W DC): -36 V DC to -72V DC</li> </ul> | <ul style="list-style-type: none"> <li>AC input (60 W AC): 90 V AC to 264 V AC, 47 Hz to 63 Hz</li> <li>High-voltage DC input (60 W AC): 190 V DC to 290 V DC (meeting 240 V high-voltage DC certification)</li> <li>DC input (1000 W DC): -36 V DC to -72V DC</li> </ul> |
| Maximum power consumption            | <ul style="list-style-type: none"> <li>77 W (without PD)</li> <li>1661 W (with PD, PD power consumption of 1600 W)</li> </ul>  | 89 W  | 59 W  |
| Noise                                | <ul style="list-style-type: none"> <li>Under normal temperature (sound power): 58.9dB (A)</li> <li>Under high temperature</li> </ul>   | <ul style="list-style-type: none"> <li>Under normal temperature (sound power): 61dB (A)</li> <li>Under high temperature</li> </ul>                            | <ul style="list-style-type: none"> <li>Under normal temperature (sound power): 58.9dB (A)</li> <li>Under high temperature</li> </ul>  |

| Item  | CloudEngine S5335-S48P4X   | CloudEngine S5335-S48S4X   | CloudEngine S5335-S48T4X   |
|---|--|--|--|
|   | (sound power): 75dB (A)<br><ul style="list-style-type: none"> <li>Under normal temperature (sound pressure): 43.8dB (A)</li> </ul>   | (sound power): 75.7dB (A)<br><ul style="list-style-type: none"> <li>Under normal temperature (sound pressure): 46dB (A)</li> </ul>   | (sound power): 75dB (A)<br><ul style="list-style-type: none"> <li>Under normal temperature (sound pressure): 43.8dB (A)</li> </ul>   |
| Long-term operating temperature               | <ul style="list-style-type: none"> <li>0-1800 m altitude: 0°C to +50°C</li> <li>1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m.</li> </ul>  | <ul style="list-style-type: none"> <li>0-1800 m altitude: 0°C to +50°C</li> <li>1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m.</li> </ul>  | <ul style="list-style-type: none"> <li>0-1800 m altitude: 0°C to +50°C</li> <li>1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m.</li> </ul>  |
| Short-term operating temperature              | <ul style="list-style-type: none"> <li>0-1800 m altitude: -5°C to +55°C</li> <li>1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m.</li> </ul> | <ul style="list-style-type: none"> <li>0-1800 m altitude: -5°C to +55°C</li> <li>1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m.</li> </ul> | <ul style="list-style-type: none"> <li>0-1800 m altitude: -5°C to +55°C</li> <li>1800-5000 m altitude: The operating temperature reduces by 1°C every time the altitude increases by 220 m.</li> </ul> |
| Storage temperature                           | -40°C to +70°C   | -40°C to +70°C   | -40°C to +70°C   |
| Relative humidity                             | 5% to 95% (non-condensing)   | 5% to 95% (non-condensing)   | 5% to 95% (non-condensing)   |
| Surge protection specification (service port) | ±7 kV in common mode   | NA   | ±7 kV in common mode   |
| Surge protection specification (power port)   | ±6 kV in differential mode, ±6 kV in common mode   | <ul style="list-style-type: none"> <li>AC power port: ±6 kV in differential mode, ±6 kV in common mode</li> <li>DC power port: ±2 kV in differential mode, ±4 kV in common mode</li> </ul>             | <ul style="list-style-type: none"> <li>AC power port: ±6 kV in differential mode, ±6 kV in common mode</li> <li>DC power port: ±2 kV in differential mode, ±4 kV in common mode</li> </ul>             |
| Heat dissipation                              | Air-cooled heat dissipation and intelligent speed adjustment   | Air-cooled heat dissipation and intelligent speed adjustment   | Air-cooled heat dissipation and intelligent speed adjustment   |

## Service Features

| Item              | Description  |
|-------------------|--|
| MAC address table | IEEE 802.1d compliance   |
|                   | MAC address learning and aging   |
|                   | Static, dynamic, and blackhole MAC address entries                                 |
|                   | Packet filtering based on source MAC addresses                                     |
| VLAN              | Guest VLAN and voice VLAN  |
|                   | GVRP   |
|                   | MUX VLAN   |
|                   | VLAN assignment based on MAC addresses, protocols, IP subnets, policies, and ports |

| Item          | Description   |
|---------------|---|
|               | 1: 1 and N: 1 VLAN mapping  |
| Reliability   | RRPP ring topology and RRPP multi-instance  |
|               | Smart Link tree topology and Smart Link multi-instance, providing millisecond-level protection switchover   |
|               | SEP   |
|               | STP (IEEE 802.1d), RSTP (IEEE 802.1w), and MSTP (IEEE 802.1s)   |
|               | ERPS (G.8032)   |
|               | BPDU protection, root protection, and loop protection   |
| IP routing    | Static route, RIPv1/v2, RIPng, OSPF, OSPFv3, ECMP, IS-IS, IS-ISv6, BGP, BGP4+, VRRP, and VRRP6  |
| IPv6 features | Neighbor Discovery (ND)   |
|               | Path MTU (PMTU)   |
|               | IPv6 ping, IPv6 tracer, and IPv6 Telnet   |
|               | 6to4 tunnel, ISATAP tunnel, and manually configured tunnel  |
| Multicast     | PIM DM, PIM SM, PIM SSM   |
|               | IGMP v1/v2/v3, IGMP v1/v2/v3 snooping and IGMP fast leave   |
|               | MLD v1/v2 and MLD v1/v2 snooping  |
|               | Multicast forwarding in a VLAN and multicast replication between VLANs  |
|               | Multicast load balancing among member ports of a trunk  |
|               | Controllable multicast  |
|               | Port-based multicast traffic statistics   |
| QoS/ACL       | Rate limiting on packets sent and received by a port  |
|               | Packet redirection  |
|               | Port-based traffic policing and two-rate three-color CAR  |
|               | Eight queues on each port   |
|               | WRR, DRR, SP, WRR+SP, and DRR+SP queue scheduling algorithms  |
|               | Re-marking of the 802.1p priority and DSCP priority   |
|               | Packet filtering at Layer 2 to Layer 4, filtering out invalid frames based on the source MAC address, destination MAC address, source IP address, destination IP address, TCP/UDP port number, protocol type, and VLAN ID |
|               | Rate limiting in each queue and traffic shaping on ports  |
| Security      | Hierarchical user management and password protection  |
|               | DoS attack defense, ARP attack defense, and ICMP attack defense   |
|               | Binding of the IP address, MAC address, port number, and VLAN ID  |
|               | Port isolation, port security, and sticky MAC   |
|               | MFF   |

| Item                       | Description   |
|----------------------------|---|
|                            | Blackhole MAC address entries   |
|                            | Limit on the number of learned MAC addresses  |
|                            | IEEE 802.1x authentication and limit on the number of users on a port                     |
|                            | AAA authentication, RADIUS authentication, HWTACACS authentication, and NAC               |
|                            | SSH v2.0  |
|                            | HTTPS   |
|                            | CPU defense   |
|                            | Blacklist and whitelist   |
|                            | IEEE 802.1x authentication, MAC address authentication, and Portal authentication         |
|                            | DHCPv4/v6 client/relay/server/snooping  |
|                            | Attack source tracing and punishment for IPv6 packets such as ND, DHCPv6, and MLD packets |
|                            | Supports separation between user authentication and policy enforcement points             |
|                            | IPSec   |
| SVF                        | Plug-and-play SVF client  |
|                            | Automatically loading the system software packages and patches of SVF clients             |
|                            | Automatically delivering service configurations in a one-click manner                     |
|                            | Independent running of SVF clients  |
| OAM                        | Software OAM:   |
|                            | EFM OAM   |
|                            | CFM OAM   |
|                            | Y.1731 performance test   |
| Management and maintenance | Virtual cable test  |
|                            | SNMP v1/v2c/v3  |
|                            | RMON  |
|                            | Web-based NMS   |
|                            | System logs and alarms of different levels  |
|                            | 802.3az EEE   |
|                            | sFlow   |
| Interoperability           | Supports VBST (Compatible with PVST/PVST+/RPVST)  |
|                            | Supports LNP (Similar to DTP)   |
|                            | Supports VCMP (Similar to VTP)  |

## Standard Compliance

| Standard Organization | Standard or Protocol |
|-----------------------|----------------------|
|-----------------------|----------------------|




| Standard Organization | Standard or Protocol  |
|-----------------------|---|
| IETF                  | <ul style="list-style-type: none"> <li>• RFC 768 User Datagram Protocol (UDP)</li> <li>• RFC 792 Internet Control Message Protocol (ICMP)</li> <li>• RFC 793 Transmission Control Protocol (TCP)</li> <li>• RFC 826 Ethernet Address Resolution Protocol (ARP)</li> <li>• RFC 854 Telnet Protocol Specification</li> <li>• RFC 951 Bootstrap Protocol (BOOTP)</li> <li>• RFC 959 File Transfer Protocol (FTP)</li> <li>• RFC 1058 Routing Information Protocol (RIP)</li> <li>• RFC 1112 Host extensions for IP multicasting</li> <li>• RFC 1157 A Simple Network Management Protocol (SNMP)</li> <li>• RFC 1256 ICMP Router Discovery</li> <li>• RFC 1305 Network Time Protocol Version 3 (NTP)</li> <li>• RFC 1349 Internet Protocol (IP)</li> <li>• RFC 1493 Definitions of Managed Objects for Bridges</li> <li>• RFC 1542 Clarifications and Extensions for the Bootstrap Protocol</li> <li>• RFC 1643 Ethernet Interface MIB</li> <li>• RFC 1757 Remote Network Monitoring (RMON)</li> <li>• RFC 1901 Introduction to Community-based SNMPv2</li> <li>• RFC 1902-1907 SNMP v2</li> <li>• RFC 1981 Path MTU Discovery for IP version 6</li> <li>• RFC 2131 Dynamic Host Configuration Protocol (DHCP)</li> <li>• RFC 2328 OSPF Version 2</li> <li>• RFC 2453 RIP Version 2</li> <li>• RFC 2460 Internet Protocol, Version 6 Specification (IPv6)</li> <li>• RFC 2461 Neighbor Discovery for IP Version 6 (IPv6)</li> <li>• RFC 2462 IPv6 Stateless Address Auto configuration</li> <li>• RFC 2463 Internet Control Message Protocol for IPv6 (ICMPv6)</li> <li>• RFC 2474 Differentiated Services Field (DS Field)</li> <li>• RFC 2740 OSPF for IPv6 (OSPFv3)</li> <li>• RFC 2863 The Interfaces Group MIB</li> <li>• RFC 2597 Assured Forwarding PHB Group</li> <li>• RFC 2598 An Expedited Forwarding PHB</li> <li>• RFC 2571 SNMP Management Frameworks</li> <li>• RFC 2865 Remote Authentication Dial In User Service (RADIUS)</li> <li>• RFC 3046 DHCP Option82</li> <li>• RFC 3376 Internet Group Management Protocol, Version 3 (IGMPv3)</li> <li>• RFC 3513 IP Version 6 Addressing Architecture</li> <li>• RFC 3579 RADIUS Support For EAP</li> <li>• RFC 4271 A Border Gateway Protocol 4 (BGP-4)</li> <li>• RFC 4760 Multiprotocol Extensions for BGP-4</li> <li>• draft-grant-tacacs-02 TACACS+</li> </ul> |
| IEEE                  | <ul style="list-style-type: none"> <li>• IEEE 802.1D Media Access Control (MAC) Bridges</li> <li>• IEEE 802.1p Traffic Class Expediting and Dynamic Multicast Filtering</li> <li>• IEEE 802.1Q Virtual Bridged Local Area Networks</li> </ul>   |

| Standard Organization | Standard or Protocol   |
|-----------------------|--|
|                       | <ul style="list-style-type: none"> <li>• IEEE 802.1ad Provider Bridges</li> <li>• IEEE 802.2 Logical Link Control</li> <li>• IEEE Std 802.3 CSMA/CD</li> <li>• IEEE Std 802.3ab 1000BASE-T specification</li> <li>• IEEE Std 802.3ad Aggregation of Multiple Link Segments</li> <li>• IEEE Std 802.3ae 10GE WEN/LAN Standard</li> <li>• IEEE Std 802.3x Full Duplex and flow control</li> <li>• IEEE Std 802.3z Gigabit Ethernet Standard</li> <li>• IEEE802.1ax/IEEE802.3ad Link Aggregation</li> <li>• IEEE 802.3ah Ethernet in the First Mile</li> <li>• IEEE 802.1ag Connectivity Fault Management</li> <li>• IEEE 802.1ab Link Layer Discovery Protocol</li> <li>• IEEE 802.1D Spanning Tree Protocol</li> <li>• IEEE 802.1w Rapid Spanning Tree Protocol</li> <li>• IEEE 802.1s Multiple Spanning Tree Protocol</li> <li>• IEEE 802.1x Port based network access control protocol</li> <li>• IEEE 802.3af DTE Power via MIDI</li> <li>• IEEE 802.3at DTE Power via the MDI Enhancements</li> </ul> |
| ITU                   | <ul style="list-style-type: none"> <li>• ITU SG13 Y.17ethoam</li> <li>• ITU SG13 QoS control Ethernet-Based IP Access</li> <li>• ITU-T Y.1731 ETH OAM performance monitor</li> </ul>   |
| ISO                   | <ul style="list-style-type: none"> <li>• ISO 10589 IS-IS Routing Protocol</li> </ul>   |
| MEF                   | <ul style="list-style-type: none"> <li>• MEF 2 Requirements and Framework for Ethernet Service Protection</li> <li>• MEF 9 Abstract Test Suite for Ethernet Services at the UNI</li> <li>• MEF 10.2 Ethernet Services Attributes Phase 2</li> <li>• MEF 11 UNI Requirements and Framework</li> <li>• MEF 13 UNI Type 1 Implementation Agreement</li> <li>• MEF 15 Requirements for Management of Metro Ethernet Phase 1 Network Elements</li> <li>• MEF 17 Service OAM Framework and Requirements</li> <li>• MEF 20 UNI Type 2 Implementation Agreement</li> <li>• MEF 23 Class of Service Phase 1 Implementation Agreement</li> <li>• Xmodem XMODEM/YMODEM Protocol Reference</li> </ul>  |

## Networking and Applications

The CloudEngine S5335-S can function as the access device and aggregation device on Metro networks and improves network reliability by link binding, dual-homing, and ringing.

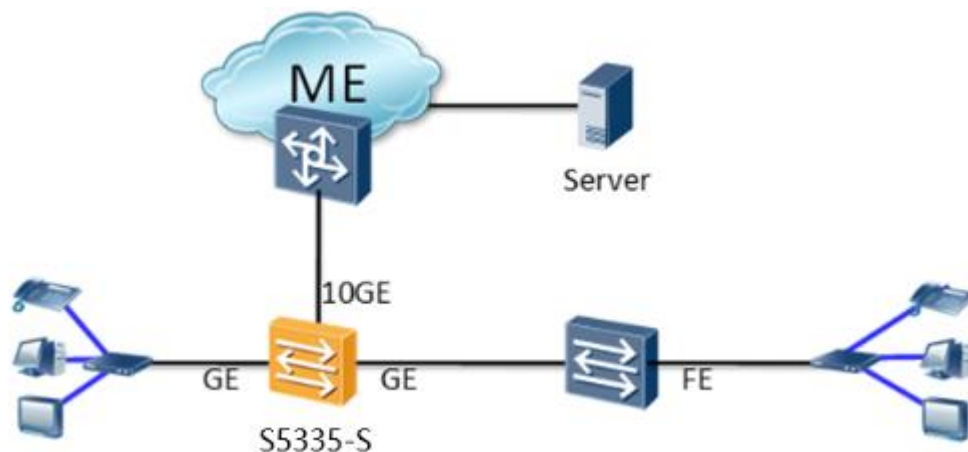

## Ordering Information

The following table lists ordering information of the CloudEngine S5335-S series switches.

| Model                     | Product Description   |
|---------------------------|---|
| CloudEngine S5335-S24T4X  | CloudEngine S5335-S24T4X (24 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports, without power supply)                                       |
| CloudEngine S5335-S24P4X  | CloudEngine S5335-S24P4X (24 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports, PoE+, without power supply)                                 |
| CloudEngine S5335-S48T4X  | CloudEngine S5335-S48T4X (48 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports, without power supply)                                       |
| CloudEngine S5335-S48P4X  | CloudEngine S5335-S48P4X (48 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports, PoE+, without power supply)                                 |
| CloudEngine S5335-S32ST4X | CloudEngine S5335-S32ST4X (24 x GE SFP ports, 8 of which are dual-purpose 10/100/1000 or SFP, 4 x 10 GE SFP+ ports, without power supply) |
| CloudEngine S5335-S48S4X  | CloudEngine S5335-S48S4X (48 x GE SFP ports, 4 x 10 GE SFP+ port, without power supply)   |
| PAC1000S56-CB             | 1000 W AC PoE power module, used in PoE models  |
| PDC1000S12-DB             | 1000 W DC power module, used in Non-PoE models  |
| PAC150S12-R               | 150 W AC power module, used in CloudEngine S5735-S48S4X   |
| PAC60S12-AR               | 60 W AC power module  |

## More Information


For more information, visit <http://www.huawei.com/> or contact your local Huawei sales office.

---

**Copyright © Huawei Technologies Co., Ltd. 2019. All rights reserved.**

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

#### **Trademarks and Permissions**

 HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

#### **Notice**

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

#### **Huawei Technologies Co., Ltd.**

Address: Huawei Industrial Base Bantian,  
Longgang Shenzhen 518129 People's  
Republic of China

Website: [e.huawei.com](http://e.huawei.com)